

ET019.028 EN




Page 1 of 2

■ Recommended spare/wear parts DN 25 to 400

			CO	2yo	5yo
102	Gasket	1	x	x	
200	Plug	1			x
301	O-ring ²⁾ (shaft sealing)	1	x	x	
303	Bushing (for non-metallic materials)	1	x	x	
401	Packing ring	1	x	x	
402	Expansion Bolt	4	x	x	
407	O-ring ³⁾ (Trunnion bearing sealing)	1	x	x	
500	Seat ring	1			x
502	Shim ring	1	x	x	
503	Shim ring	1	x	x	
504	Gasket	1	x	x	
620	Packing ring *	2	x	x	
621	Packing cord *	3	x	x	
644	O-ring ¹⁾ (TA-Luft-Version)	1	x	x	
645	O-ring ¹⁾ (TA-Luft-Version)	2	x	x	

CO=commissioning; 2yo=2 years operation; 5yo=5 years operation

(*) Depending on the application, different packing ring materials and packing ring combinations can be used. The number of packing rings (5) stays constant.

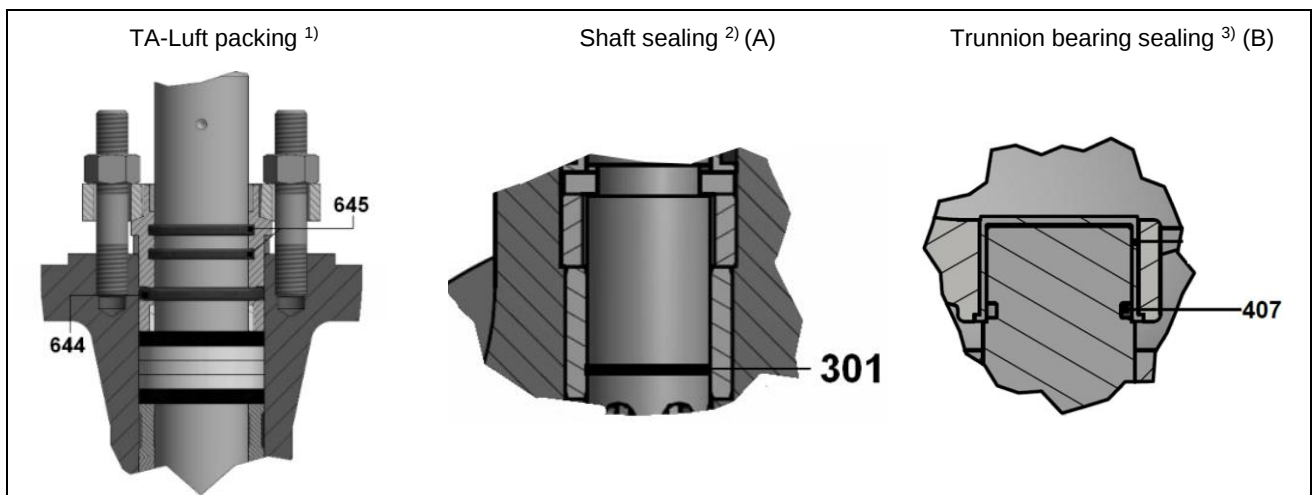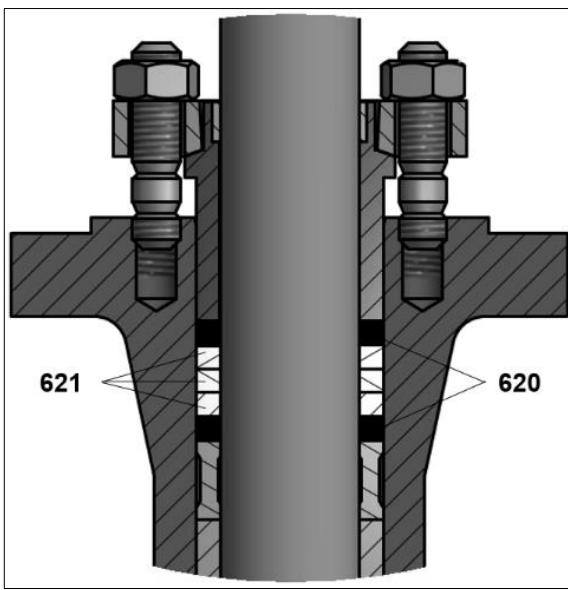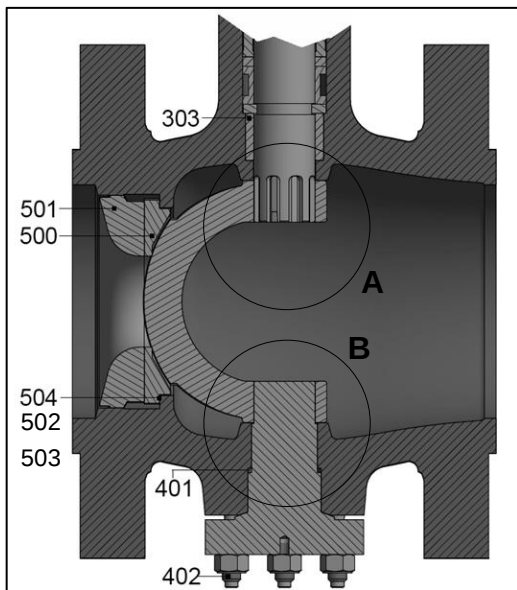

■ Recommended spare/wear parts DN 500

		CO	2yo	5yo
200	Plug	1		x
301	O-ring ²⁾ (shaft sealing)	x	x	
303	Bushing (for non-metallic materials)	x	x	
402	Expansion Bolt	x	x	
407	O-ring ³⁾ (Trunnion bearing sealing)	x	x	
500	Seat ring			x
502	Shim ring	X	X	
503	Shim ring	x	x	
504	Gasket	x	x	
620	Packing ring *	x	x	
621	Packing cord *	x	x	
644	O-ring ¹⁾ (TA-Luft-Version)	x	x	
645	O-ring ¹⁾ (TA-Luft-Version)	x	x	

CO=commissioning; 2yo=2 years operation; 5yo=5 years operation

(*) Depending on the application, different packing ring materials and packing ring combinations can be used. The number of packing rings (5 + 4) stays constant.

